



## TECHNICAL DATA SHEET | PRECAST CONCRETE


### **Tightness protection**

# Round band course

Protection system for waterproofing upstands for pillars.
"PTRC" model is recommended on terraces, because it facilitates the connection to the slabs.

#### **MANUFACTURE**

- Concrete composition: cement; sand; gravel; water; adjuvants according to NP EN 206-1 and LNEC E-464 specification; composition defined by CDAC (Secil) laboratory.
- Band course made with reinforced concrete.
- Available in grey and white.

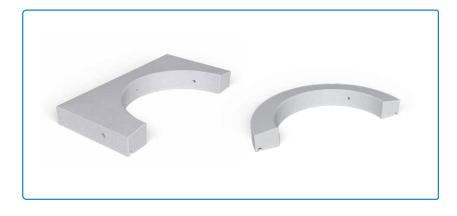

#### **APPLICATION**


- Fixing:
- . 2 flanged Zn hex heads bolts DIN 6921 M6 x 70.
  - . 2 nickel brass anchors M6.
- Drilling with Ø 8.160 twist drill.
- Spanner wrench: 10mm screwdriver or moderate power screwer.


#### **BENEFITS**

- Easy to install.
- Durability.
- Screws included.
- Other colours on demand.

PRODUCT INFORMATION						
Reference	Designation	<b>Dimensions</b> D x H x h x l (mm)	Unit weight (Kg ∆±5%)	Pairs / pallet	Weight/palette (Kg Δ±5%)	Resistance and exposure class
PT15	Round band course 15	150 x 60 x 50 x 80	2,5	30	180	C25/30, XC1
PT20	Round band course 20	200 x 60 x 50 x 80	3,5	30	240	C25/30, XC1
PT25	Round band course 25	250 x 60 x 50 x 80	3,75	30	255	C25/30, XC1
PT30	Round band course 30	300 x 60 x 50 x 80	5	30	330	C25/30, XC1
PT30L5	Round band course 30 L5	300 x 60 x 50 x 50	10	30	330	C25/30, XC1
PT35	Round band course 35	350 x 60 x 50 x 80	5,5	30	360	C25/30, XC1
PT40	Round band course 40	400 x 60 x 50 x 80	6	30	390	C25/30, XC1
PT45	Round band course 45	450 x 60 x 50 x 80	6,5	30	420	C25/30, XC1
PT50	Round band course 50	500 x 60 x 50 x 80	7,5	30	450	C25/30, XC1
PT60	Round band course 60	600 x 55 x 45 x 80	9	15	300	C25/30, XC1
PT70	Round band course 70	700 x 55 x 45 x 80	10,5	15	345	C25/30, XC1
PTRC20	Square band course 20	200 x 45 x 40 x 60	3,5	30	240	C25/30, XC1
PTRC25	Square band course 25	250 x 45 x 40 x 60	3,75	30	255	C25/30, XC1
PTRC30	Square band course 30	300 x 45 x 40 x 60	5	30	330	C25/30, XC1
PTRC40	Square band course 40	400 x 45 x 40 x 60	6	30	390	C25/30, XC1

NB: Product liability is limited to the supplied product quality, and the garantee ends whenever there's a misuse or a neglected use. All complaints concerning the appearance of the products must be done before application. We remind you that the application means that the product is fine.





Edition: january 2024 Contacts : Tel : 01 55 85 19 99 | Fax : 01 55 85 19 98 | e-mail : contact@euro-prefa.com