


Wall copings

**PIER COPING
FOUR WAYS
WEATHERED**

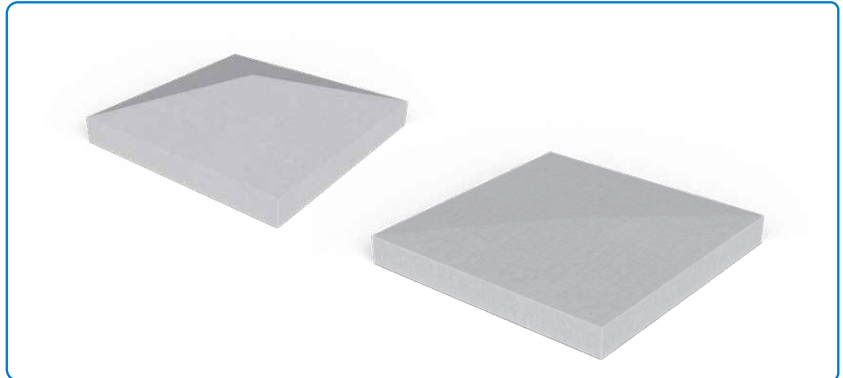

MANUFACTURE

- Concrete composition: cement; sand; gravel; water; adjuvant.
- Wall coping made in reinforced concrete.

APPLICATION

Seal the coping to the wall with adhesive mortar or polymer. Apply before the finishings (coatings, paintings, etc.). The distance between the wall and the coping edge must be equal or superior to 40mm.

ENEFITS

- Easy to install.
- Durability.
- Aesthetic.
- Available in grey and white.

PRODUCT INFORMATION

Reference	Designation	Dimensions (mm)			Unit weight (kg $\Delta\pm 5\%$)	Unit/ pallet	Post (mm)	Resistance and exposure class
		l	h	H				
PD030	Pointe Diamant 30	300	40	50	8,5	40	200	C25/30, XC1
PD035	Pointe Diamant 35	350	40	50	11,5	30	250	C25/30, XC1
PD040	Pointe Diamant 40	400	40	50	15	30	300	C25/30, XC1
PD050	Pointe Diamant 50	500	60	140	47	20	400	C25/30, XC1
PD060	Pointe Diamant 60	600	60	140	68	40	500	C25/30, XC1

NB: Product liability is limited to the supplied product quality, and the guarantee ends whenever there's a misuse or a neglected use. All complaints concerning the appearance of the products must be done before application. We remind you that the application means that the product is fine.

