


Wall copings

ONCE WEATHERED WALL COPING

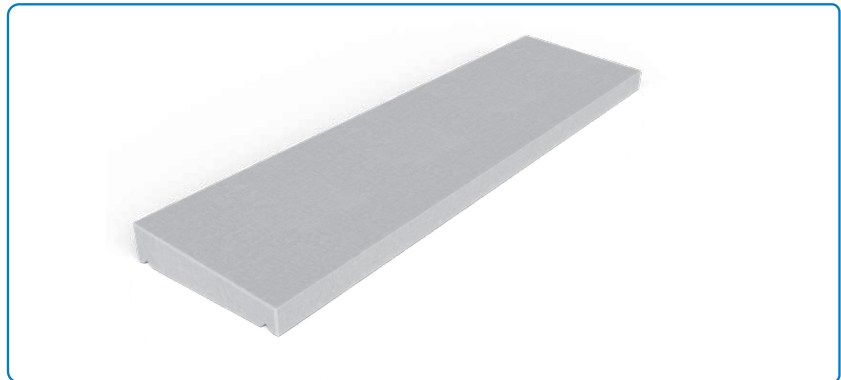

MANUFACTURE

- Concrete composition: cement; sand; gravel; water; adjuvant.
- Wall coping made in reinforced concrete.

APPLICATION

Seal the coping to the wall with adhesive mortar or polymer. It is recommended to use adhesive between the copings.


BENEFITS

- Easy to install.
- Durability.
- Aesthetic.
- Available in grey and white.

PRODUCT INFORMATION

Reference	Designation Standard references	I x L	Dimensions (mm)				Unit weight (kg $\Delta\pm 5\%$)	Unit/ pallet	Wall (mm)		Resistance and exposure class
			e	i	H	h			laying to a face	laying in the middle	
CH024	Once weathered wall coping 16	160 x 1000	30	100	60	40	17	40	--	100	C25/30, XC1
CH020	Once weathered wall coping 22	220 x 1000	30	160	60	40	23,5	40	150	100	C25/30, XC1
CH021	Once weathered wall coping 26	260 x 1000	30	200	60	40	28	32	200	150	C25/30, XC1
CH025	Once weathered wall coping 30	300 x 1000	30	240	60	40	32	30	250	200	C25/30, XC1
CH022	Once weathered wall coping 35	350 x 1000	30	290	60	40	38	20	300	250	C25/30, XC1
Special references											
CH023	Once weathered wall coping 45	450 x 500	30	390	80	60	33,5	24	400	350	C25/30, XC1
CH019	Once weathered wall coping 48	480 x 500	30	420	60	40	26,5	40	430	380	C25/30, XC1
CH027	Once weathered wall coping 58	580 x 500	30	520	60	40	32	30	530	480	C25/30, XC1
CH026	Once weathered wall coping 62	620 x 500	30	560	60	40	32,5	30	550	500	C25/30, XC1
CH029	Once weathered wall coping 64	640 x 500	30	580	60	40	35,5	30	590	540	C25/30, XC1
CH028	Once weathered wall coping 68	680 x 500	30	620	60	40	37,5	30	630	580	C25/30, XC1
CH051	Once weathered wall coping 28	280 x 1000	30	220	75	55	42	24	200	150	C25/30, XC1
CH052	Once weathered wall coping 32	320 x 1000	30	260	80	55	50	24	150	200	C25/30, XC1
CH053	Once weathered wall coping 20	209 x 1000	30	140	58	40	23	40	150	100	C25/30, XC1
CH054	Once weathered wall coping 37	370 x 1000	30	310	85	55	60	15	320	270	C25/30, XC1
CH055	Once weathered wall coping 40	400 x 1000	30	340	60	40	46	20	350	300	C25/30, XC1
CH056	Once weathered wall coping 45	450 x 1000	30	390	60	40	52	20	400	350	C25/30, XC1

NB: Product liability is limited to the supplied product quality, and the guarantee ends whenever there's a misuse or a neglected use. All complaints concerning the appearance of the products must be done before application. We remind you that the application means that the product is fine.

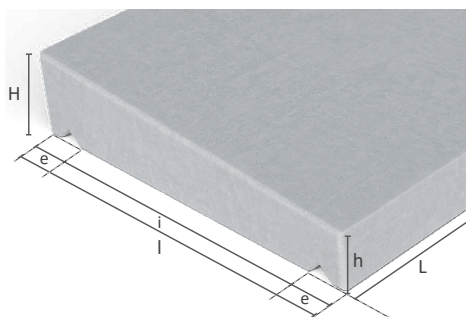

2 kinds of laying:

